

NEW ORLEANS DISTRICT DREDGING SCHEDULE

Fiscal Year 2020


WEDA – Gulf Coast Chapter
November 13, 2019



US Army Corps
of Engineers®



BUILDING STRONG®
and Taking Care of People!

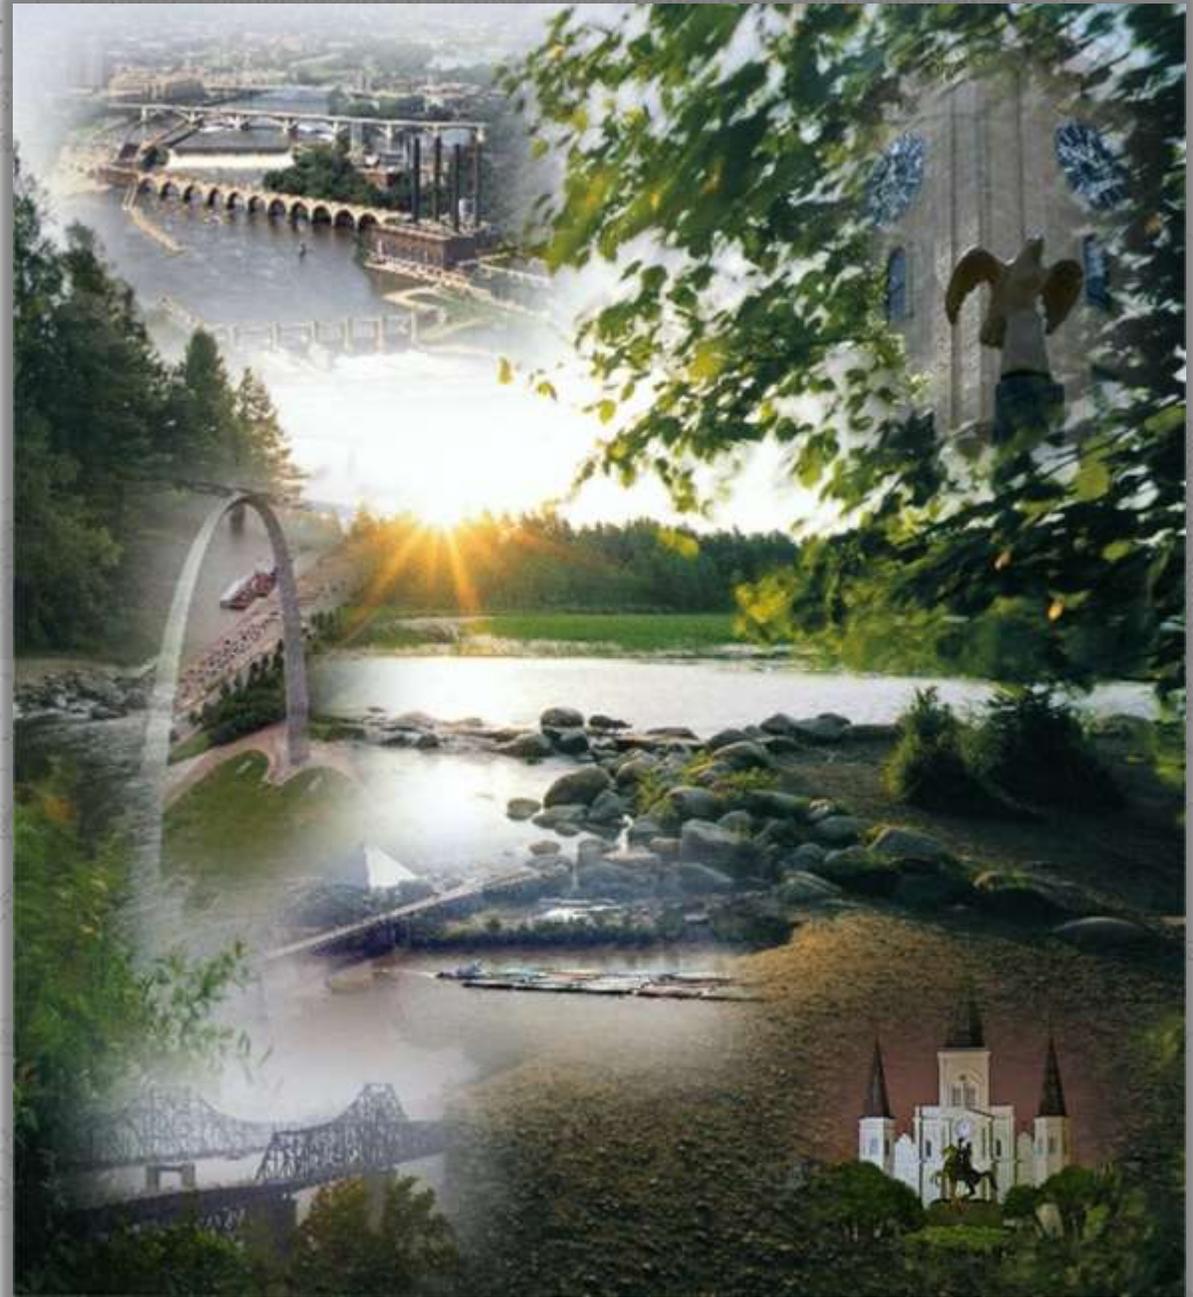



OVERVIEW OF NEW ORLEANS DISTRICT



2,800 Miles of Navigable Waterways & 400 Miles of Deep Draft Channels

75 Million Cubic Yards of Dredged Material Removed Annually

18 Navigable Locks & Control Structures

24% of U.S. Tonnage Travels through LA Ports (570+ Million Tons)

5 of the Nation's 15 Busiest Ports



BUILDING STRONG[®]
and Taking Care of People!



NEW ORLEANS DISTRICT FY 2020 GANTT CHART




Job	Start time	Duration	Est. Quantity	Calendar year 2020											
				01 Jan	01 Feb	01 Mar	01 Apr	01 May	01 Jun	01 Jul	01 Aug	01 Sep	01 Oct	FY 2021	
														01 Nov	01 Dec
FY20 GULF COAST REGIONAL H	2020-02-29	243	9000000			Hopper									
MISS RIV HDR 1-20	2020-03-11	81	2500000			Hopper									
MISS RIV SWP CDR 1-20	2020-03-15	107	5000000			Pipeline									
MISS RIV HDR 13-19	2020-03-30	92	3000000			Hopper									
MISS RIV HDR 2-20	2020-04-01	75	2500000			Hopper									
MISS RIV HDR 3-20	2020-04-15	76	2500000			Hopper									
NOH CDR 1-20	2020-05-13	74	800000				Pipeline								
ATCHAFALAYA RIVER CY	2020-06-30	122	3000000				Pipeline								
TIGER PASS CY	2020-08-16	153	1900000					Pipeline							
CALC MILE 5-17/DEVL'S ELBO	2020-09-21	334	4500000						Pipeline						

 Hopper – Large Size – 6,000+ cy

 Pipeline – 24”+



BUILDING STRONG®
and Taking Care of People!

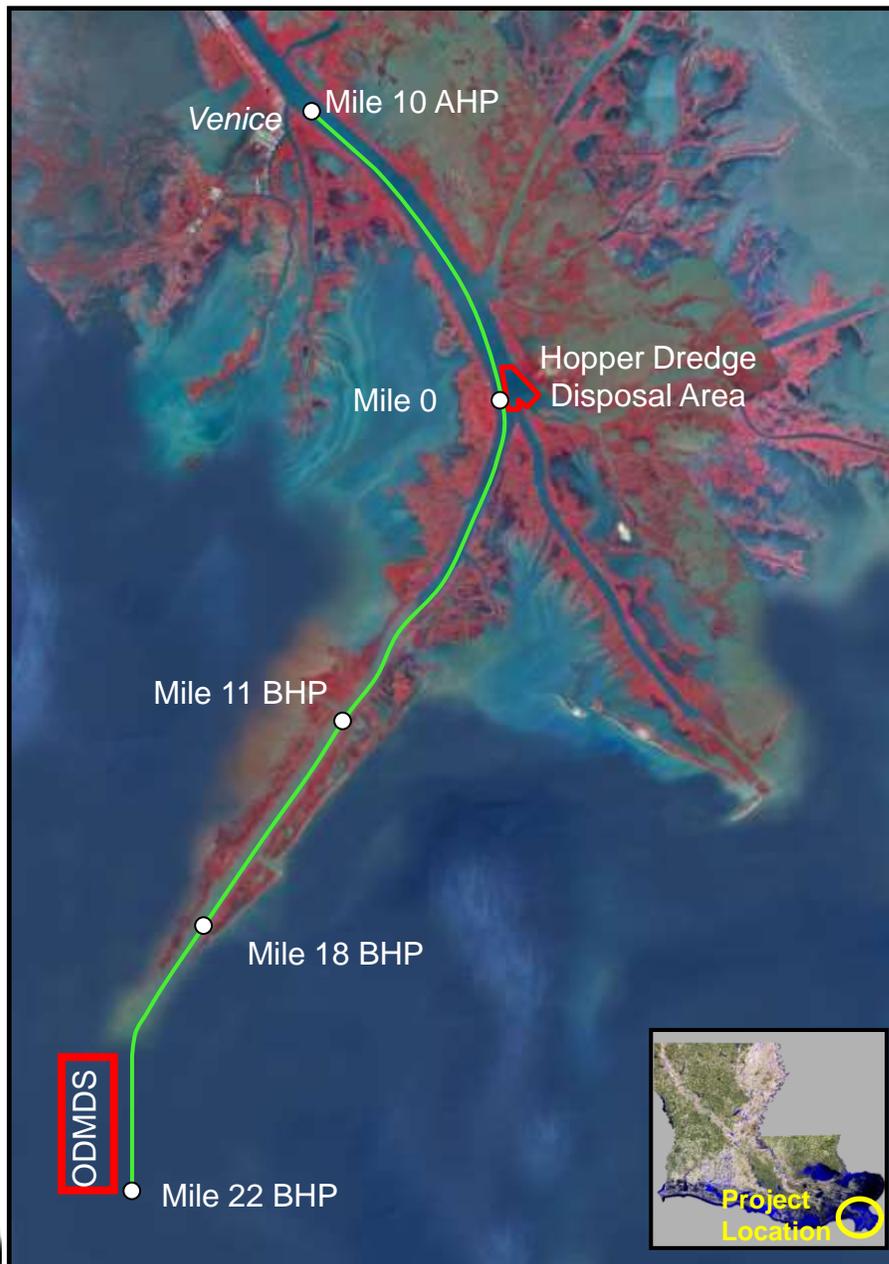

FY20 GULF COAST REGIONAL Mississippi River - Southwest Pass

Type of Equipment: Hopper

Schedule: March 2020 (3-6 months)

Depth: -48.5 ft MLLW

Width: 600 ft – 750 ft

Quantity: 5 Million Cubic Yards

Placement Areas:

Hopper Dredge Disposal Area (HDDA)


Ocean Disposal Site (ODMDS)

Last Dredged: 2019

Operations Manager: Michelle Kornick 504-862-1842



BUILDING STRONG[®]
and Taking Care of People!

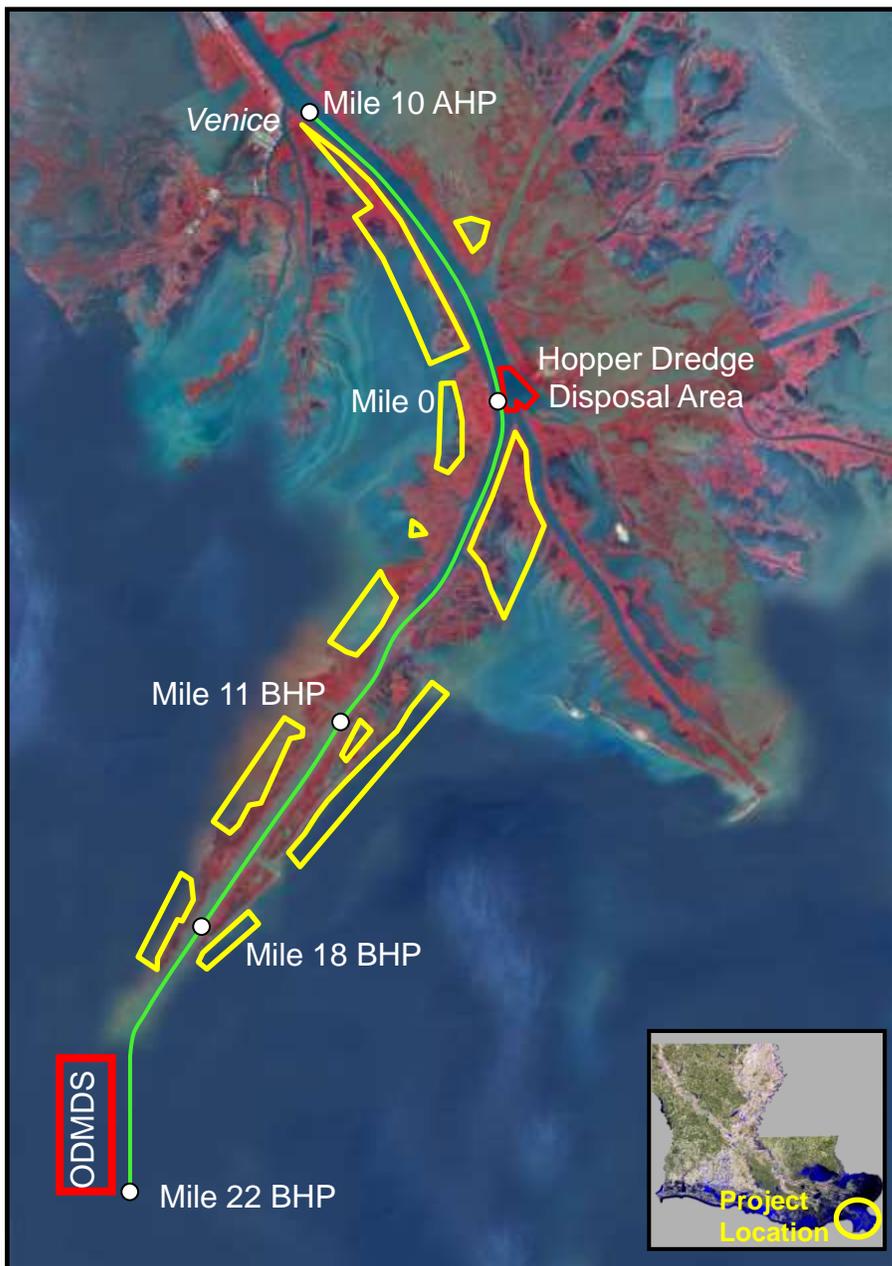

MISSISSIPPI RIVER

Southwest Pass HDR / CDR

Type of Equipment: Hopper / Cutterhead

Schedule: Based on River Conditions

Depth: -48.5 ft MLLW

Width: 600 ft – 750 ft

Quantity: 15.5 Million Cubic Yards

Placement Areas: Open Water, Wetland Development

- Hopper Dredge Disposal Area (HDDA)
- Ocean Disposal Site (ODMDS)
- Beneficial Use

Last Dredged: 2019


Operations Manager: Michelle Kornick 504-862-1842



BUILDING STRONG[®]
and Taking Care of People!



MISSISSIPPI RIVER, NEW ORLEANS HARBOR #1-2020

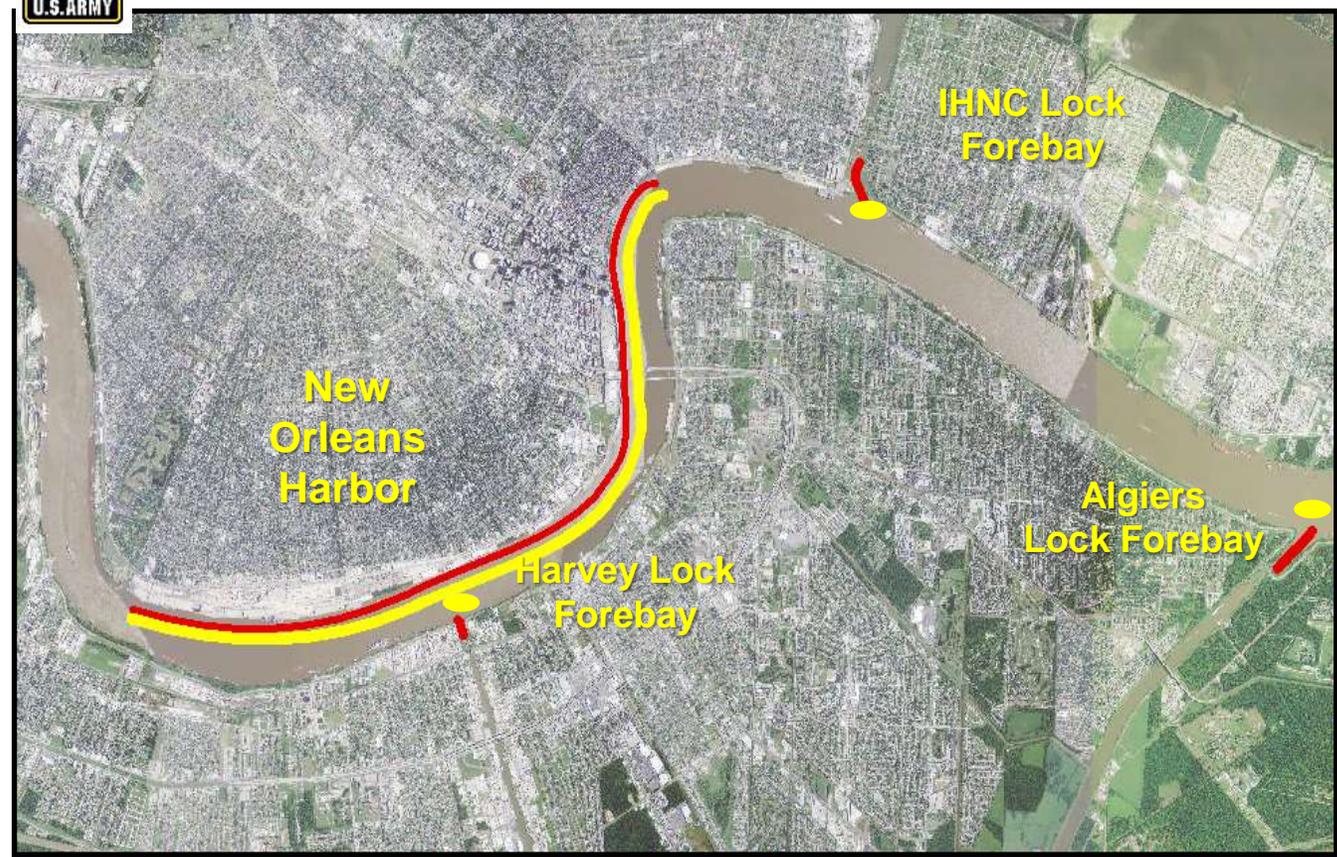

- Open Water Placement
- Dredging Region



Type of Equipment: Cutterhead

Schedule: Based on River Stage

Depth: Varies by location, -12 ft to -35 ft

Quantity: (Annual Avg)
 Harbor - 800K cy
 Locks - 100K cy

Placement Area: Open Water


Last Dredged: 2019

Operations Managers:
 Michelle Kornick (N.O. Harbor) 504-862-1842;
 Vic Landry (GIWW Locks) 504 862-2407



BUILDING STRONG®
and Taking Care of People!

ATCHAFALAYA RIVER, BAYOU CHENE

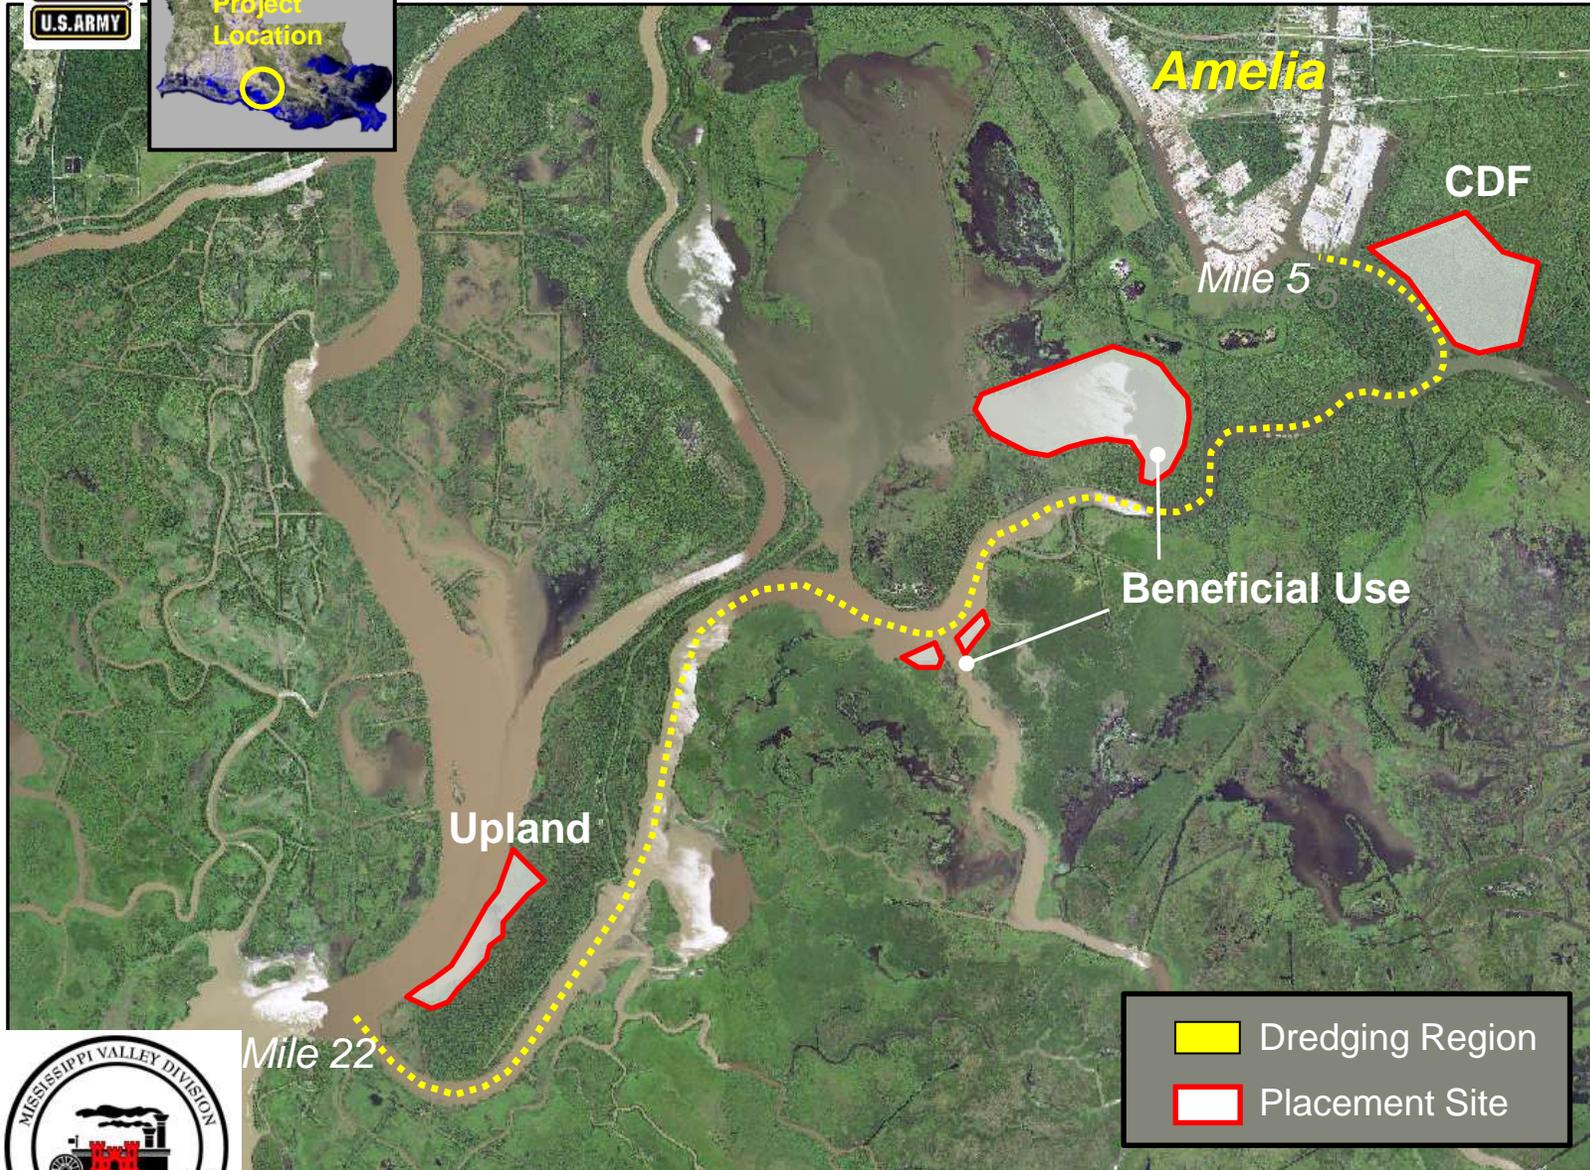

Dredge Type: Cutterhead

Schedule: July - Oct 2020

Dimensions: -20 ft MLG X 400'

Quantity: 3 MCY

Placement: CDF, Upland & Beneficial Use (Wetland Development)

Last Dredged: 2010




BUILDING STRONG®
and Taking Care of People!

Operations Manager: Tim Connell 504-862-2360



MISSISSIPPI RIVER OUTLET AT VENICE, TIGER PASS

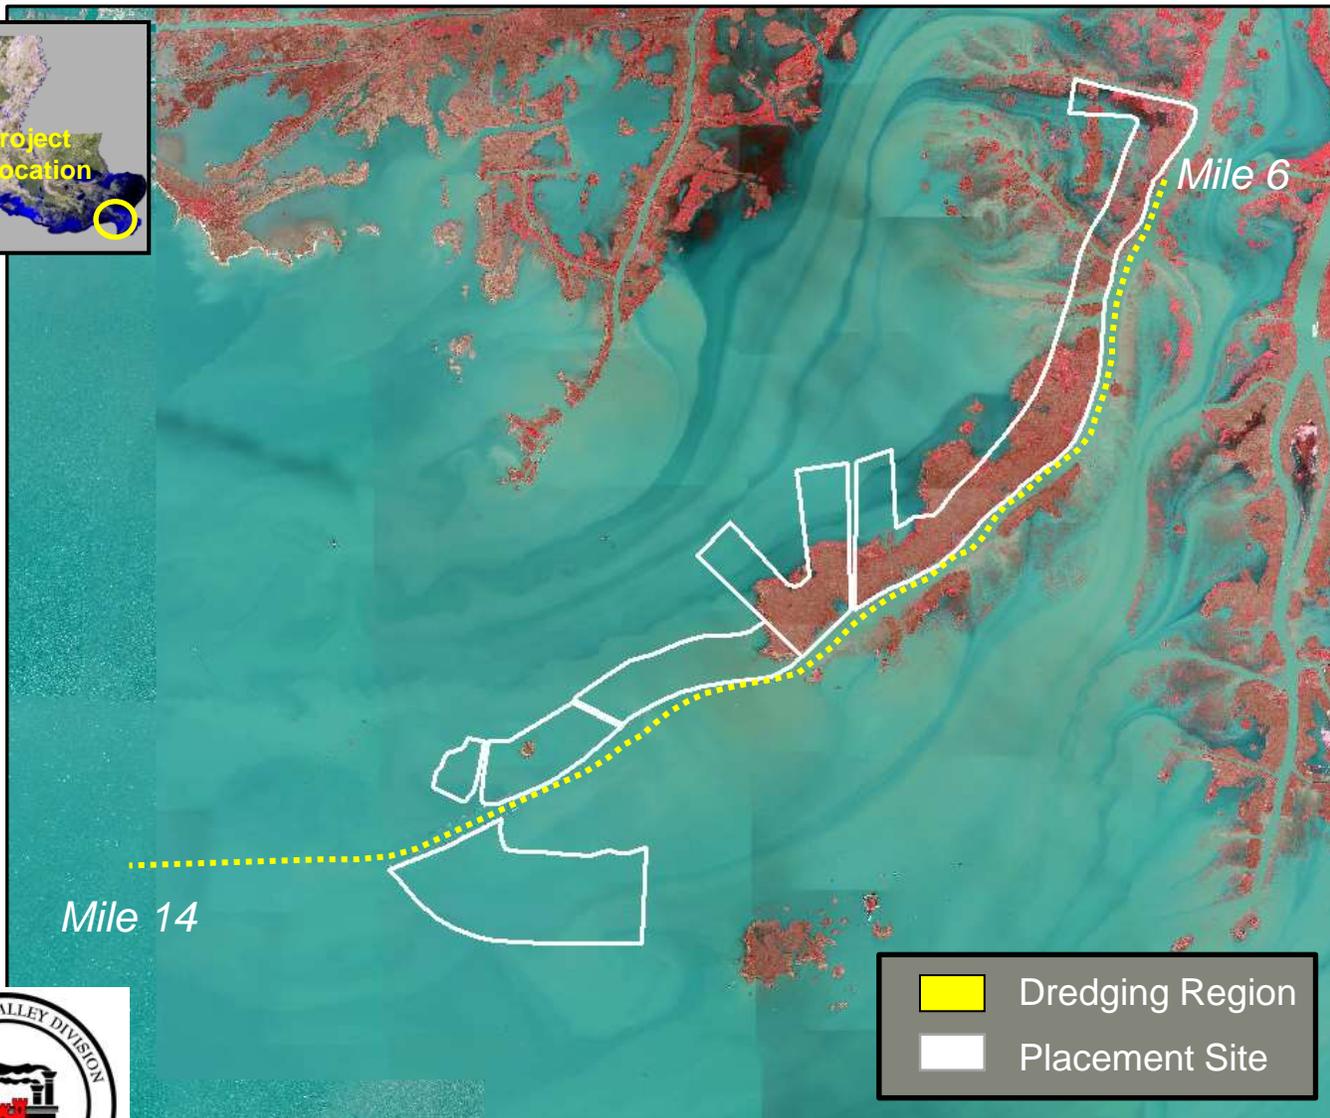

Dredge type: Cutterhead

Schedule: Aug – Dec 2020

Dimensions: -14 ft MLG X 150 ft

Quantity: 1.9 MCY

Placement: Wetlands Development

Last Dredged: 2012



BUILDING STRONG[®]
and Taking Care of People!

Operations Manager: Ray Newman 504-862-2050



CALCASIEU RIVER

Miles 5-17 & Devil's Elbow

Type of Equipment: Cutterhead

Schedule: Sep 2020 - Jul 2021


Dimensions: -40 ft MLG X 400 ft

Quantity: 4.5 Million Cubic Yards

Placement Area: Upland CDFs

Last Dredged: 2019

-  Dredging Region
-  Placement Site

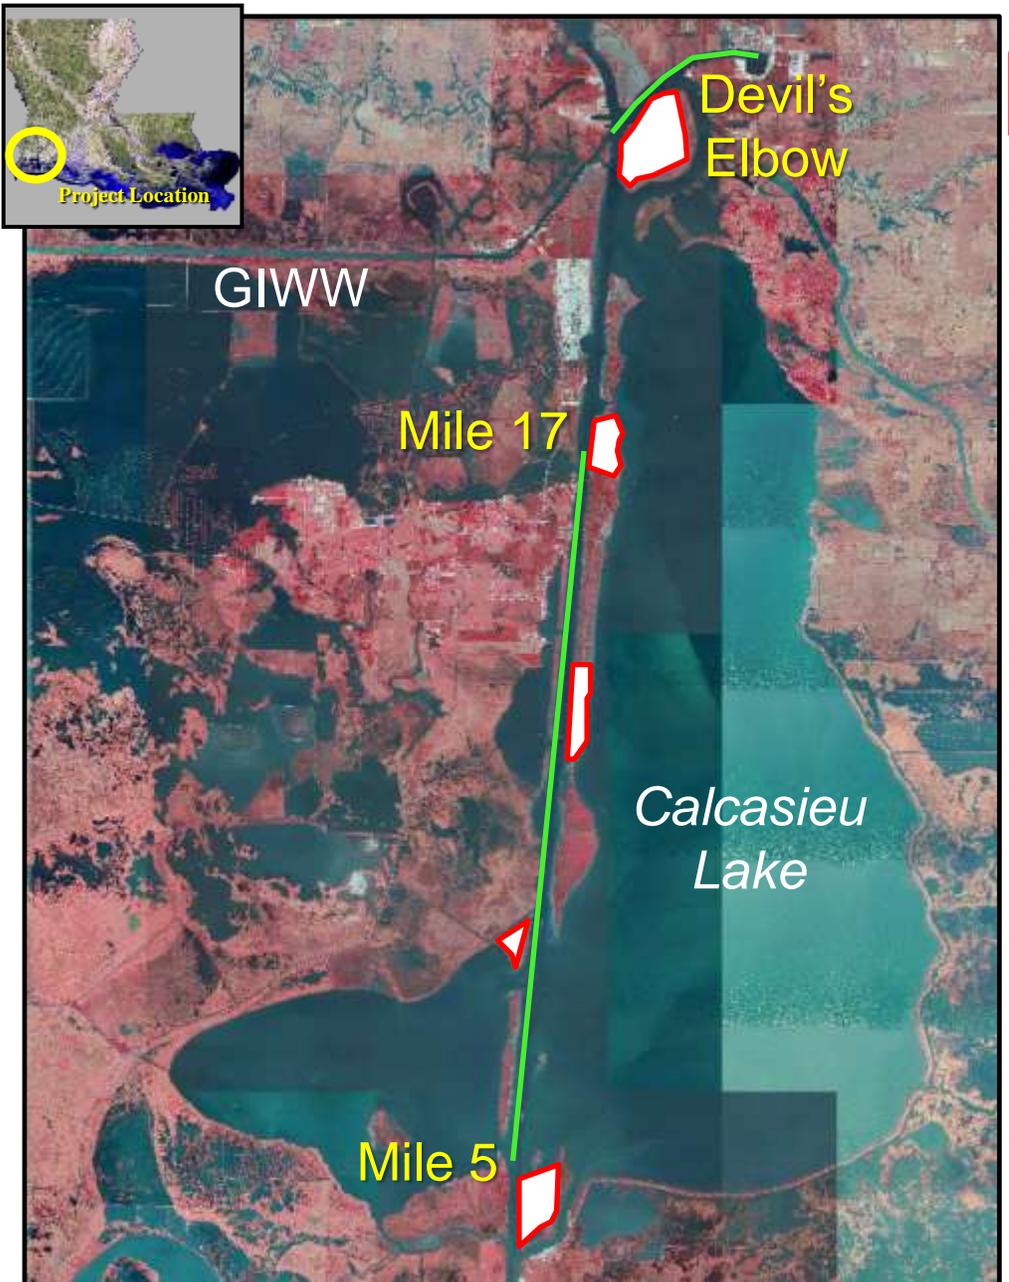

BUILDING STRONG[®]
and Taking Care of People!

Operations Manager: Tracy Falk 504-862-2971