

U.S. ARMY CORPS OF ENGINEERS NEW YORK DISTRICT

FY2017 DREDGING PROGRAM



26 October 2016

Flushing Bay & Creek Federal Navigation Project



**US Army Corps
of Engineers**



OVERVIEW

- ❖ FY17 NAN Dredging Program
- ❖ Detailed Project Slides






US Army Corps
of Engineers®




FY17 Dredging Program

Project	Dredge Type	Quantity (CY)	Placement Site	Advertise	Bid Opening	Award	SB Set-Aside (Y/N)	Env. No-Work Windows	2016			2017								
									OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP
Maintenance Dredging																				
East Rockaway, NY	Pipeline	200,000	Beach	15-Sep-16	18-Oct-16	2-Nov-16	N	15 Jan –30 Sep												
Newark Bay 40/50ft, NJ	Mechanical	400,000	Upland	03-Apr-17	02-May-17	16-Jun-17	N	15 Jan – 30 Jun												
NY Harbor, Sandy Hook Channel	Mechanical	250,000	Ocean	01-Jun-17	03-Jul-17	20-Jul-17	N	15 Nov – 15 Sep												
Hurricane Sandy Shore Protection Projects																				
Fire Island – Moriches Stabilization #3B (Fire Island Communities)	Hopper	2,500,000	Shoreline	1-Jun-17	17-Jul-17	15-Aug-17	N	TBD												
Long Beach, NY – Contract #2*	Hopper	4,800,000	Shoreline	1-Oct-17	1-Nov-17	7-Nov-17	N	01 Apr – 31 Aug												
Union Beach, NJ*	Hopper	700,000	Shoreline	2-Oct-17	1-Nov-17	2-Jan-18	N	None												

* FY18 Contract Awards

LEGEND	
	Hopper
	Mechanical
	Pipeline


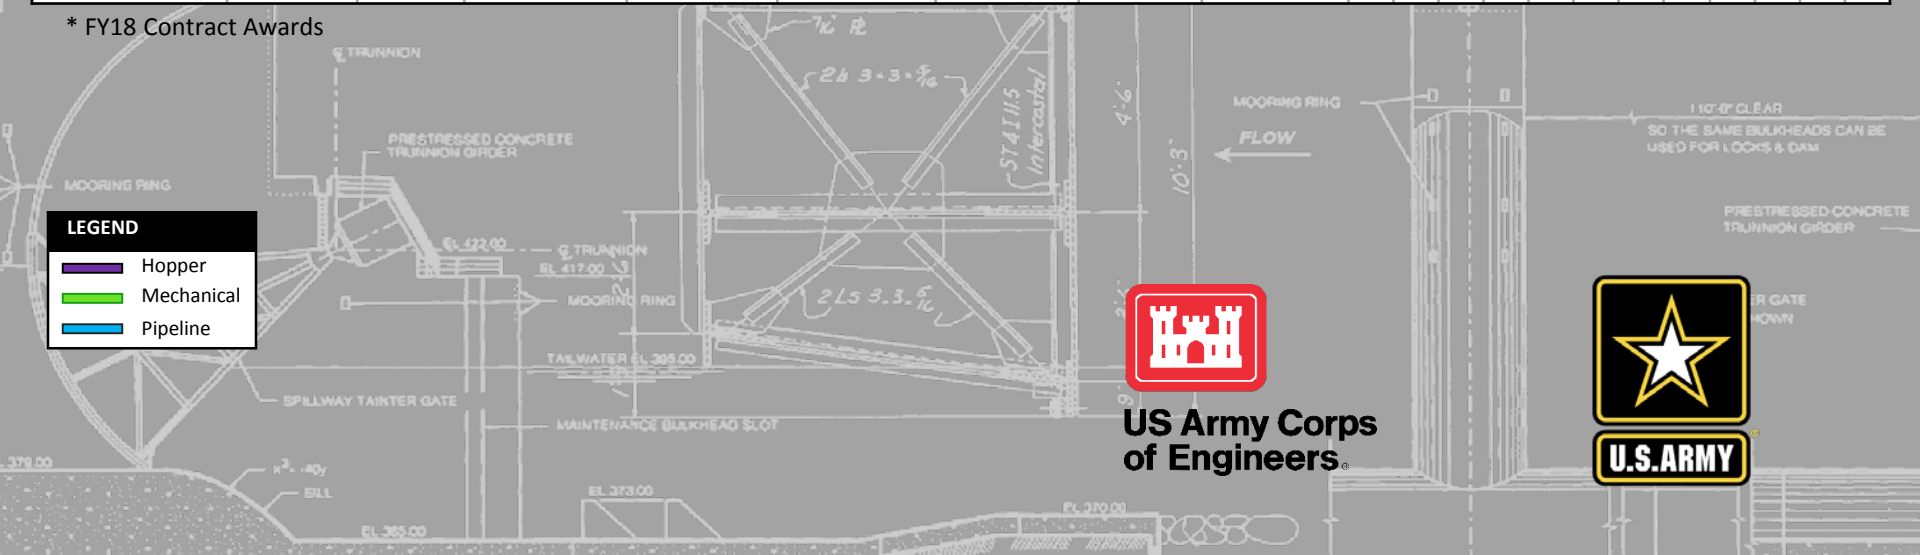


US Army Corps of Engineers



EAST ROCKAWAY, NEW YORK

Scope of Work	O&M Dredging
Quantity:	200,000 CY
Material Type:	Sand
Placement Areas:	Beach
Equipment:	Pipeline
Environmental Windows:	15 January – 30 September
Advertisement Date:	September 2016
Bid Opening Date:	October 2016
Start Date: (NTP)	November 2016
Issues:	Boardwalk Construction Adjacent to Placement Site

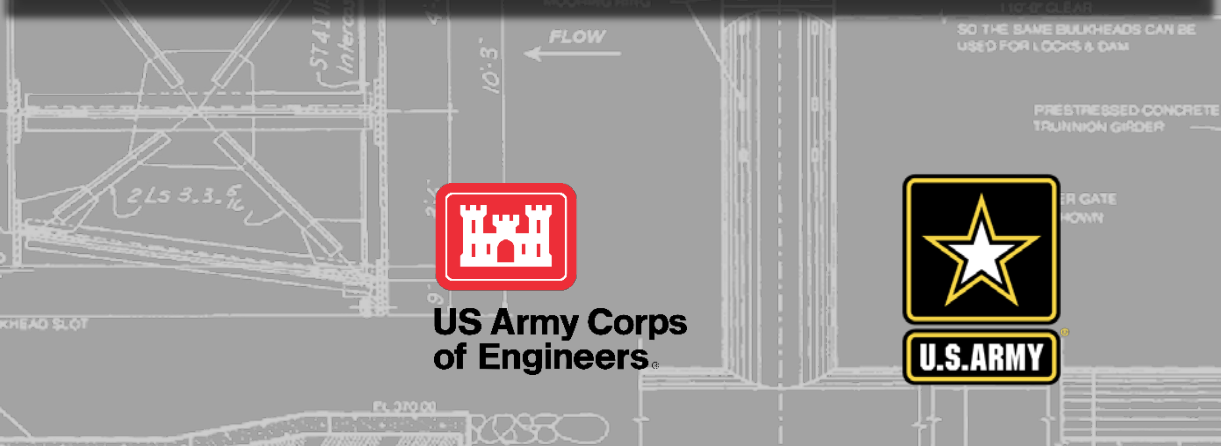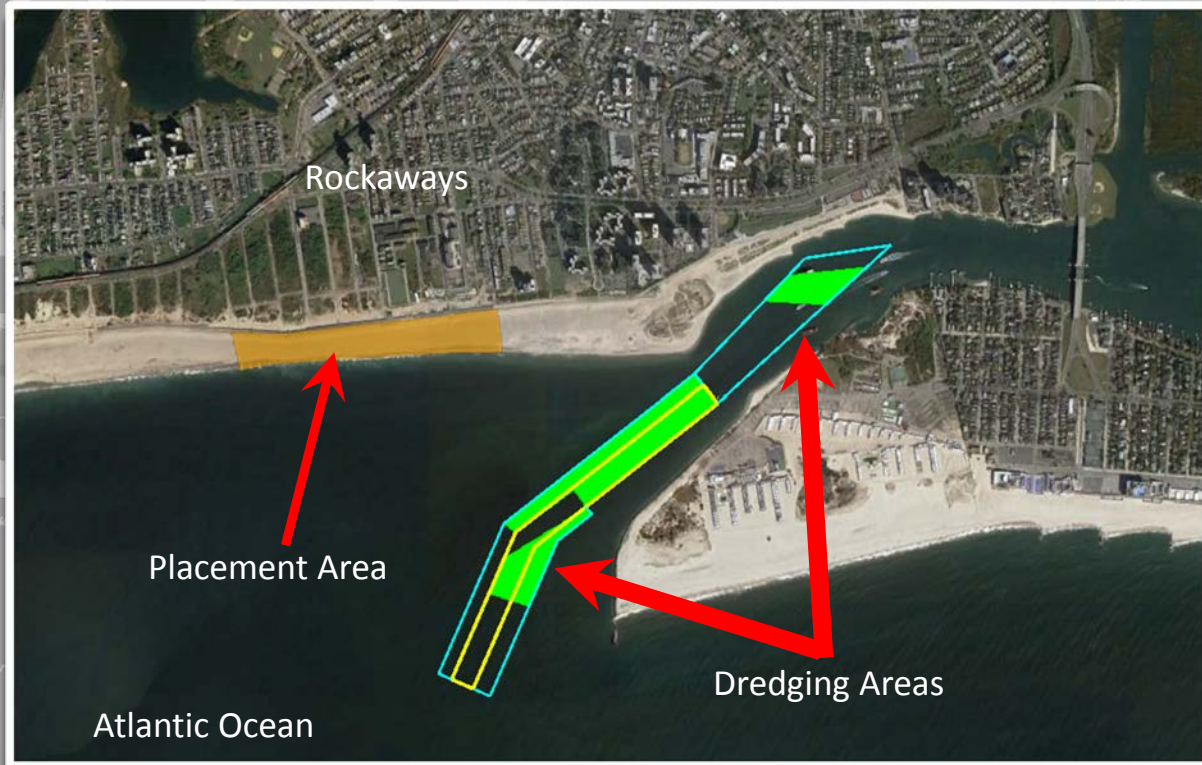


US Army Corps of Engineers



U.S. ARMY

NEWARK BAY 40/50 FT, NEW JERSEY

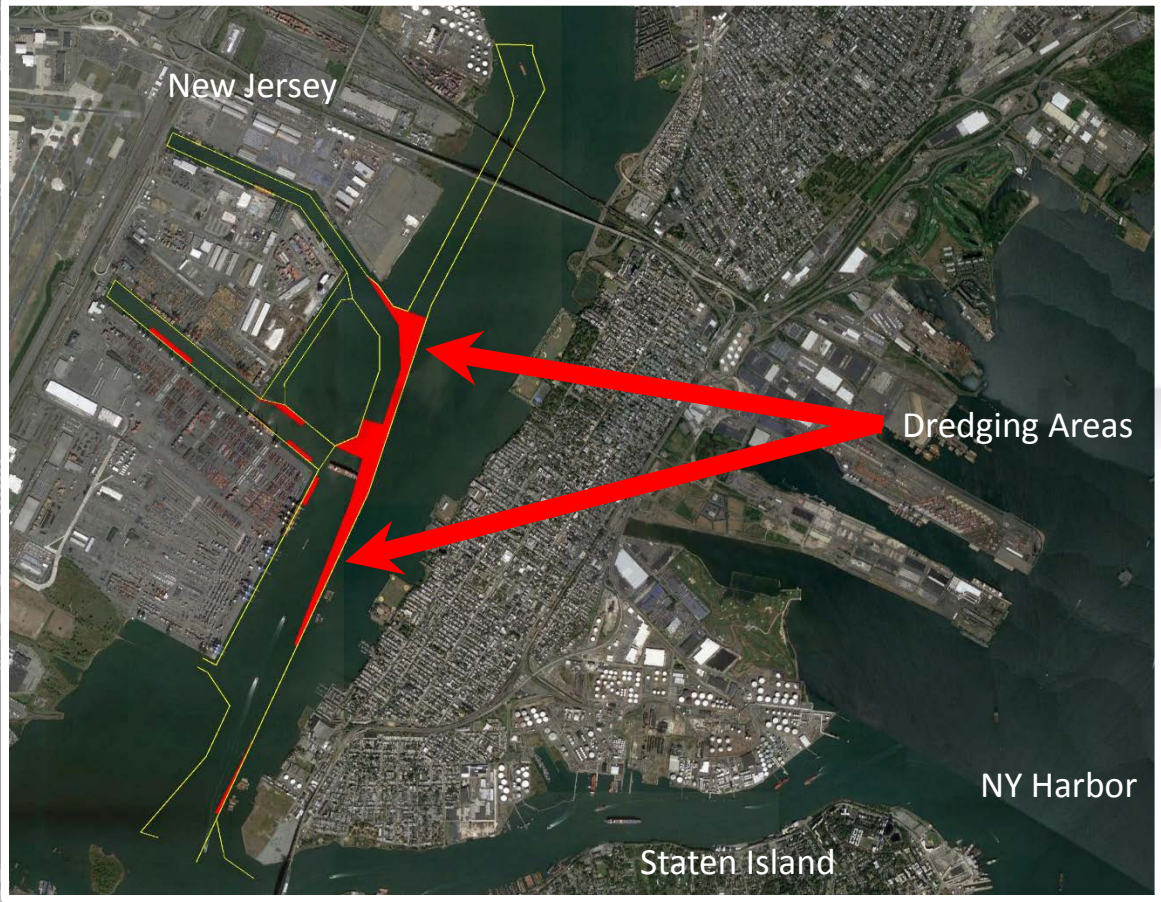

Scope of Work	O&M Dredging
Quantity:	400,000 CY
Material Type:	Silt and Clay
Placement Areas:	Upland
Equipment:	Mechanical
Environmental Windows:	15 January – 30 June
Advertisement Date:	April 2017
Bid Opening Date:	May 2017
Start Date: (NTP)	July 2017
Issues:	None



US Army Corps of Engineers




NY HARBOR - SANDY HOOK CHANNEL

Staten Island



New Jersey

Scope of Work	O&M Dredging
Quantity:	250,000 CY
Material Type:	Sand
Placement Areas:	Ocean
Equipment:	Mechanical
Environmental Windows:	15 November – 15 September
Advertisement Date:	June 2017
Bid Opening Date:	July 2017
Start Date: (NTP)	September 2017
Issues:	None

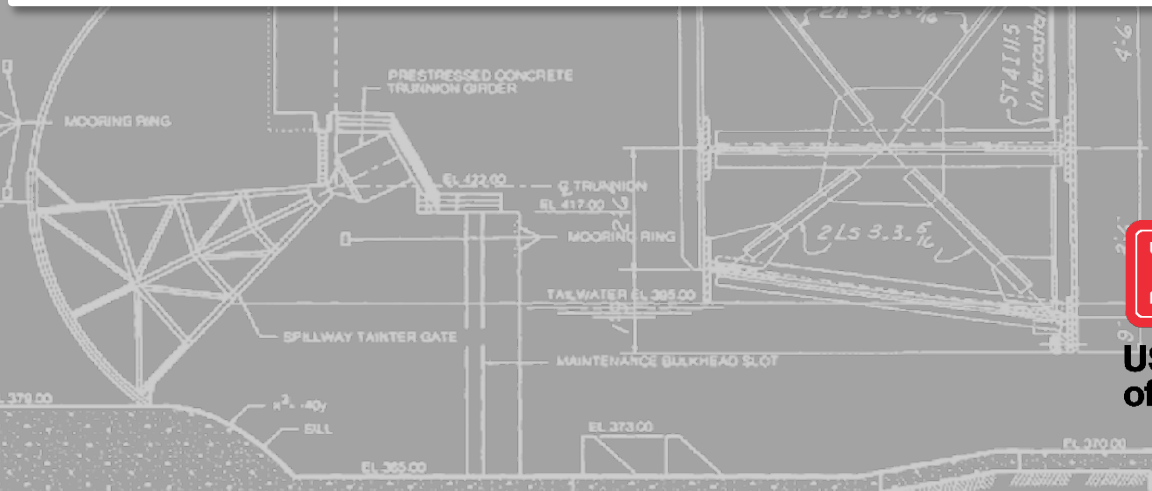

US Army Corps of Engineers



FIRE ISLAND INLET TO MORICHES INLET, NY FIRE ISLAND STABILIZATION CONTRACT #3B

Scope of Work	Coastal Storm Risk Management
Quantity:	2,500,000 CY
Material Type:	Sand
Placement Areas:	Ocean Bay Park to Davis Park
Equipment:	Hopper
Environmental Windows:	To Be Determined
Advertisement Date:	Jun-17
Bid Opening Date:	Jul-17
Start Date: (NTP)	Sep-17
Issues:	Real Estate Acquisition Challenges



**US Army Corps
of Engineers**



LONG BEACH, NY CONTRACT #2

Scope of Work	Coastal Storm Risk Management
Quantity:	4,800,000 CY
Material Type:	Sand
Placement Areas:	Long Beach to Pt. Lookout
Equipment:	Hopper
Environmental Windows:	No Dredging 1 Apr – 31-Aug
Advertisement	Oct-17
Bid Opening:	Nov-17
Start Date: (NTP)	Feb-18
Issues:	None




**US Army Corps
of Engineers**



UNION BEACH, NJ CONTRACT #1

Scope of Work	Coastal Storm Risk Management
Quantity:	700,000 CY
Material Type:	Sand
Placement Areas:	Union Beach, NJ (Raritan Bay)
Equipment:	Hopper
Environmental Windows:	None
Advertisement Date:	Oct -17
Bid Opening Date:	Nov-17
Start Date: (NTP)	Jan-18
Issues:	Distance from Borrow Area to Placement Site

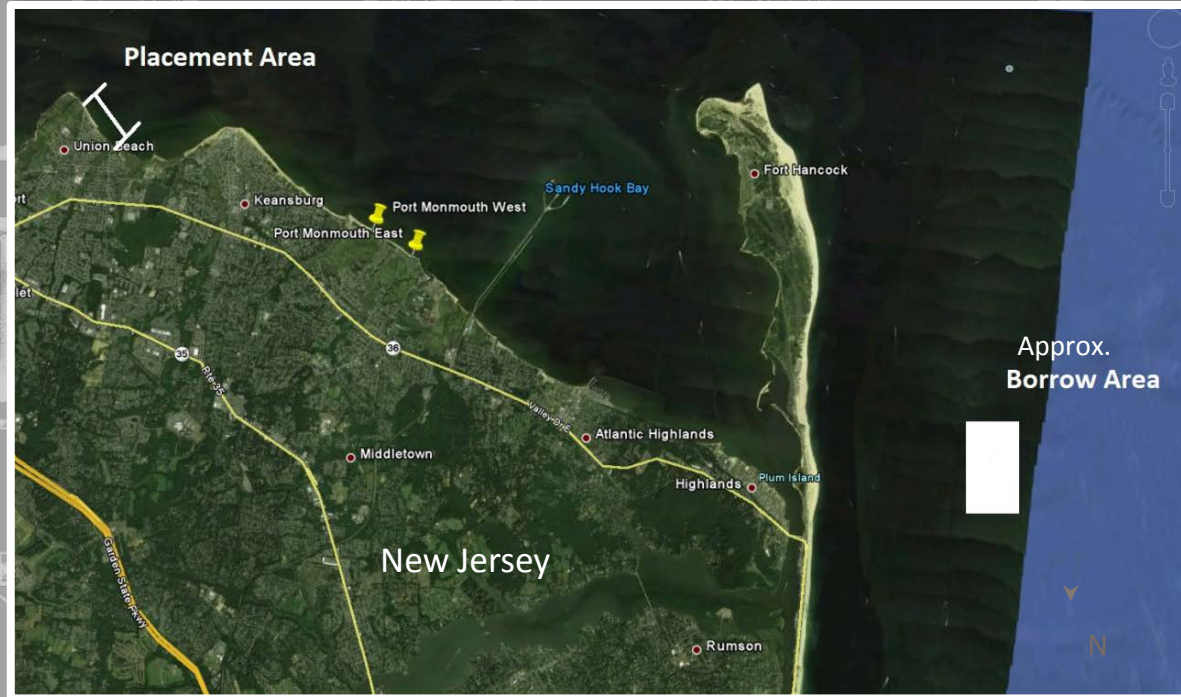

**US Army Corps
of Engineers**



Any Questions?

Gerlyn T. Perlas
Chief, Technical Support Section
US Army Corps Of Engineers, New York
26 Federal Plaza
New York, NY 10278
(917) 790-8414
gerlyn.t.perlas@usace.army.mil



US Army Corps
of Engineers®

